



Staple type: KL 500  
 18 GAUGE STAPLES MEDIUM CROWN  
 Wire Ø: 1.15mm

### Suitable for the following tools\*:

haubold PN 530 L-1 / Automatik LM  
 PN 540 (L-1)  
 PN 530 / 540 V  
 PN 540 A


*\*please check staple length compatibility with each tool before use*


Staple lengths available: 30mm – 40mm  
 Staples per strip: 104

For fixing of non load-bearing gypsum plasterboard systems onto timber



### CORROSION PROTECTION

| Finish        | Usage Environment   | Label Colour on Packaging |
|---------------|---|---------------------------|
| Zinc Galv 3µm | Service Class 1<br>INDOOR  | Blue                      |

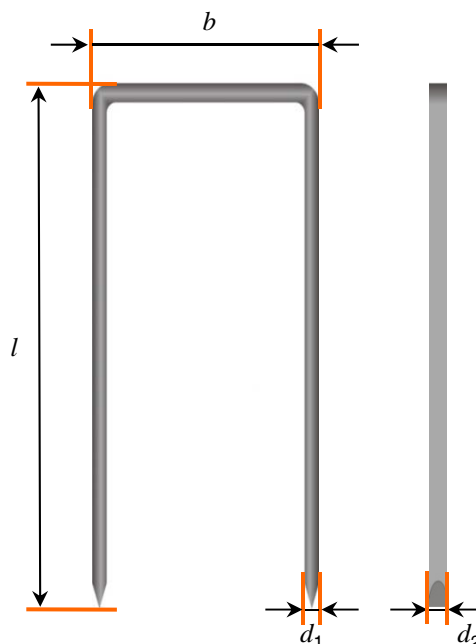

EN 14566:2008  
+A1:2009

DIN 18182-B



Chisel Point  
"C"

### STAPLE PROPERTIES / DIMENSIONS

Tensile strength of wire: min 900 N/mm<sup>2</sup>  
 Nominal diameter (d): 1.15mm  
 Flattened wire dimension: (d<sub>1</sub>): 1.00mm  
 (d<sub>2</sub>): 1.23mm  
 Outside crown width (b): 11.00mm  
 Strip length: approx 128.00mm  
 Standard point: "C"  
 Coated leg length: Full

### RECOMMENDED EDGE DISTANCES

ITW recommended minimum edge distances:

Tapered Edge Plasterboard = 10mm  
 Cut Edge Plasterboard = 15mm

For more comprehensive information please contact your gypsum board manufacturer.

### STAPLE LENGTHS AVAILABLE

| Finish        | Lengths Available |
|---------------|-------------------|
| Zinc Galv 3µm | 30mm, 35mm, 40mm  |

haubold is a brand of the ITW Group. ITW reserves the right to change specification without notice. All design using this data should be carried out by a qualified structural engineer, subject to relevant National and European standards or regulations.