



Staple type: KL 5000  
 19 GAUGE STAPLES NARROW CROWN  
 Wire Ø: 0.99mm

### Suitable for the following tools\*:

- haubold PN 6040 (L1)
- PN 6040 A
- PN 5016 J
- PN 5035 V

*\*please check staple length compatibility with each tool before use*


Staple lengths available: 30mm  
 Staples per strip: 84

For fixing of non load-bearing gypsum plasterboard systems onto timber



### CORROSION PROTECTION

Finish	Usage Environment	Label Colour on Packaging
Zinc Galv 3µm	Service Class 1 INDOOR	Blue

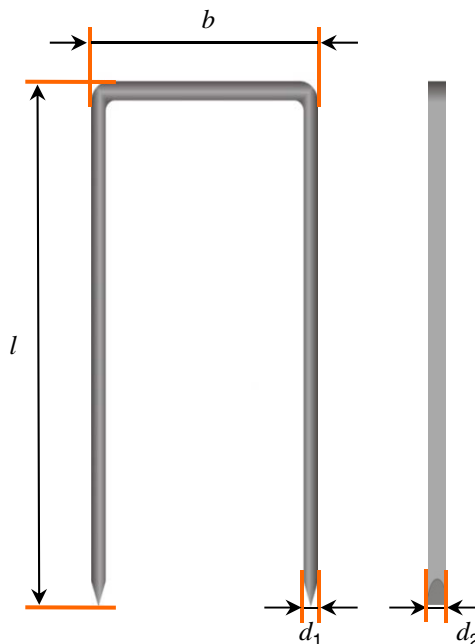

EN 14566:2008  
+A1:2009

DIN 18182-A



Chisel Point  
"C"

### STAPLE PROPERTIES / DIMENSIONS

Tensile strength of wire:	min 900 N/mm <sup>2</sup>
Nominal diameter (d):	0.99mm
Flattened wire dimension:	(d <sub>1</sub> ): 0.80mm (d <sub>2</sub> ): 1.09mm
Outside crown width (b):	5.20mm
Strip length:	approx 92.00mm
Standard point:	"C"
Coated leg length:	Full

### RECOMMENDED EDGE DISTANCES

ITW recommended minimum edge distances:

Tapered Edge Plasterboard	= 10mm
Cut Edge Plasterboard	= 15mm

For more comprehensive information please contact your gypsum board manufacturer.

### STAPLE LENGTHS AVAILABLE

Finish	Lengths Available
Zinc Galv 3µm	30mm

haubold is a brand of the ITW Group. ITW reserves the right to change specification without notice. All design using this data should be carried out by a qualified structural engineer, subject to relevant National and European standards or regulations.