



Staple type: KG 700

16 GAUGE STAPLES MEDIUM CROWN

Wire Ø: 1.53mm



Suitable for the following tools*:


haubold	PN 750 A, PN 755 (XI) A PN 764 XII, PN 765 (A) PN 775 XII
Duo-Fast	SM-7648 / 7664, HDS-7650 / 7665
Toolmatic	S540.4701
<i>*please check staple length compatibility with each tool before use</i>	
Staple lengths available:	38mm – 64mm
Staples per strip:	75

For fixing of non load-bearing gypsum plasterboard systems onto timber



CORROSION PROTECTION

Finish	Usage Environment	Label Colour on Packaging
Zinc Galv 3µm	Service Class 1 INDOOR 	Blue
Zinc Galv 12µm	Service Class 1 & 2 INDOOR & COVERED OUTDOOR 	Purple

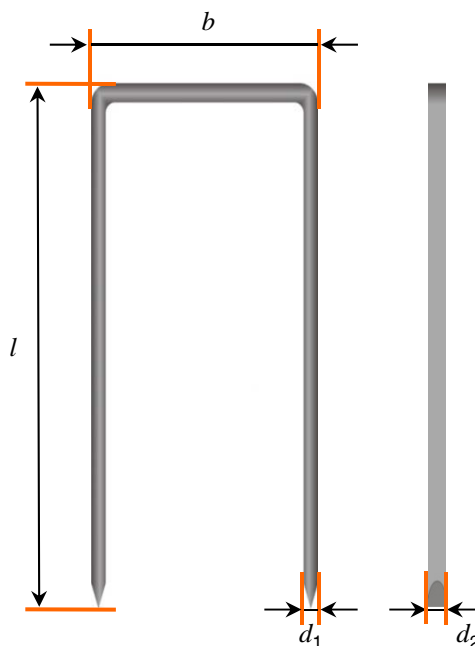

EN 14566:2008
+A1:2009

DIN 18182-D



Chisel Point
"C"

STAPLE PROPERTIES / DIMENSIONS

Tensile strength of wire:	min 900 N/mm ² min 1400 N/mm ²
Nominal diameter (d):	1.53mm
Flattened wire dimension:	(d ₁): 1.34mm (d ₂): 1.60mm
Outside crown width (b):	11.25mm
Strip length:	approx 121.50mm
Standard point:	"C"
Coated leg length:	Full

RECOMMENDED EDGE DISTANCES

ITW recommended minimum edge distances:

Tapered Edge Plasterboard	= 10mm
Cut Edge Plasterboard	= 15mm

For more comprehensive information please contact your gypsum board manufacturer.

STAPLE LENGTHS AVAILABLE

Finish	Lengths Available
Zinc Galv 3µm	38mm, 40mm, 45mm, 50mm 60mm, 64mm
Zinc Galv 12µm	45mm, 50mm, 55mm, 64mm

haubold is a brand of the ITW Group. ITW reserves the right to change specification without notice. All design using this data should be carried out by a qualified structural engineer, subject to relevant National and European standards or regulations.