

Staple type: KL 5000

21 GAUGE STAPLES NARROW CROWN

Wire Ø: 0.99mm





# Suitable for the following tools\*:

haubold PN 6040 (L1)

PN 6040 A

PN 5016 J

PN 5035 G


\*please check staple length compatibility with each tool before use

Staple lengths available: 15mm - 40mm

Staples per strip: 84

### CORROSION PROTECTION

Finish	Usage Environment		Label Colour on Packaging
Zinc Galv 3µm	INDOOR		Blue
Stainless Steel A2 AISI 304 / WNr 1.4301	INDOOR, COVERED OUTDOOR & OUTDOOR	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Yellow

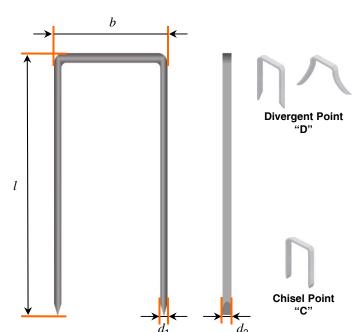

# STAPLE PROPERTIES / DIMENSIONS

Tensile strength of wire: min 900 N/mm<sup>2</sup>

Nominal diameter (d): 0.99mm

Flattened wire dimension:  $(d_1)$ : 0.80mm

 $(d_2)$ : 1.09mm

Outside crown width (b): 5.20mm

Strip length: approx 92.00mm

"C" & "D" Standard point:

Coated leg length: Full

# STAPLE LENGTHS AVAILABLE\*

Finish	Lengths Available *Other lengths on request	
Zinc Galv 3µm	15mm, 18mm, 20mm, 25mm, 40mm	
Stainless Steel A2 AISI 304 / WNr 1.4301	15mm, 20mm, 25mm, 30mm, 40mm	

haubold is a brand of the ITW Group. ITW reserves the right to change specification without notice. All design using this data should be carried out by a qualified structural engineer, subject to relevant National and European standards or regulations.