



Staple type: KG 700



16 GAUGE STAPLES MEDIUM CROWN


Wire Ø: 1.53mm

Suitable for the following tools*:

haubold	PN 750 A, PN 755 (XI) A PN 764 XII, PN 765 (A) PN 775 XII
Duo-Fast	SM-7648 / 7664, HDS-7650 / 7665
Toolmatic	S310.4702 / S510.4701
<i>*please check staple length compatibility with each tool before use</i>	
Staple lengths available:	16mm – 75mm
Staples per strip:	75

CORROSION PROTECTION

Finish	Usage Environment	Label Colour on Packaging
Zinc Galv 3µm	INDOOR 	Blue
Zinc Galv 12µm	INDOOR & COVERED OUTDOOR 	Purple

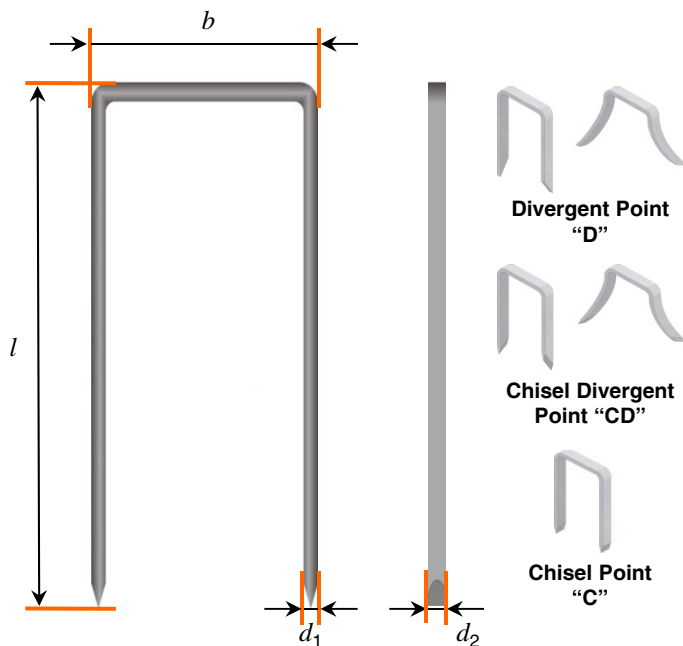

STAPLE PROPERTIES / DIMENSIONS

Tensile strength of wire:	min 900 N/mm ²
Nominal diameter (<i>d</i>):	1.53mm
Flattened wire dimension:	(<i>d</i> ₁): 1.34mm (<i>d</i> ₂): 1.60mm
Outside crown width (<i>b</i>):	11.25mm
Strip length:	approx 121.50mm
Standard point:	“D” / “CD” / “C”
Coated leg length:	Full

STAPLE LENGTHS AVAILABLE*

Finish	Lengths Available <small>*Other lengths on request</small>
Zinc Galv 3µm	'C' Point: 20mm, 25mm, 30mm, 32mm, 35mm, 70mm, 75mm 'D' Point: 25mm, 30mm, 32mm, 45mm
Zinc Galv 12µm	'CD' Point: 16mm, 18mm, 22mm, 25mm, 28mm, 30mm, 35mm, 50mm, 55mm

haubold is a brand of the ITW Group. ITW reserves the right to change specification without notice. All design using this data should be carried out by a qualified structural engineer, subject to relevant National and European standards or regulations.