

## **Technical Data**

Staple type: W16 Staples

16 GAUGE STAPLES WIDE CROWN

Wire Ø: 1.52mm



## Suitable for the following tools\*:

Paslode S200 W16

> S150 W16R 3150 W16

3200 W16 (R)

Toolmatic S520.4805


\*please check staple length compatibility with each tool before use

Staple lengths available: 16mm - 50mm

Staples per strip: 72

## CORROSION PROTECTION

Finish	Usage Environment		Label Colour on Packaging
Zinc Galv 1-3µm	INDOOR		Blue
Stainless Steel A2 AISI 304 / WNr 1.4301	INDOOR, COVERED OUTDOOR & OUTDOOR	0 0 0 0	Yellow

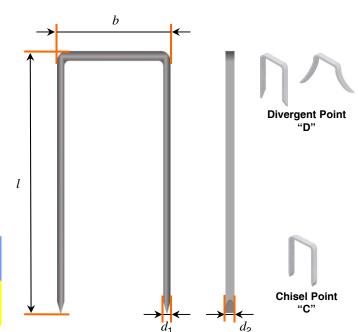

## STAPLE PROPERTIES / DIMENSIONS

Tensile strength of wire: min 880 N/mm<sup>2</sup>

Nominal diameter (d): 1.52mm

Flattened wire dimension:  $(d_1)$ : 1.39mm

 $(d_2)$ : 1.58mm

Outside crown width (b): 23.30mm

Strip length: approx 115.00mm

"C" & "D" Standard point:

Coated leg length: Full

AISI 304 / WNr 1.4301

Finish	Lengths Available *Other lengths on request  'C' Point: 16mm, 19mm, 22mm, 25mm, 28mm, 32mm, 38mm, 50mm 'D' Point: 16mm, 25mm	
Zinc Galv 1-3µm		
Stainless Steel A2	50mm	

Paslode is a brand of the ITW Group. ITW reserves the right to change specification without notice. All design using this data should be carried out by a qualified structural engineer, subject to relevant National and European standards or regulations.

Issue date 02.03.2015 © ITW