


TECHNICAL DATA SHEET



DIAMETER	• 2.8
SHANK	• Ring
FINISHES	• Stainless Steel
COLLATION	• Plastic collated strip nails
TOOLS	• PSN90 - PSN100 - PF90 IM350 - IM90i - IM100i

MATERIAL PROPERTIES / DIMENSIONS

- **Tensile strength wire:** minimum 700 N/mm²
- **Diameter, Shank (Ds)¹:** 2.80 mm
- **Diameter, Profile minimum (Dp):** 2.90 mm
- **Diameter, Head (Dh)²:** 6.50 mm
- **Nail length total (Lt)¹:** 45 / 55 / 70 / 80 mm

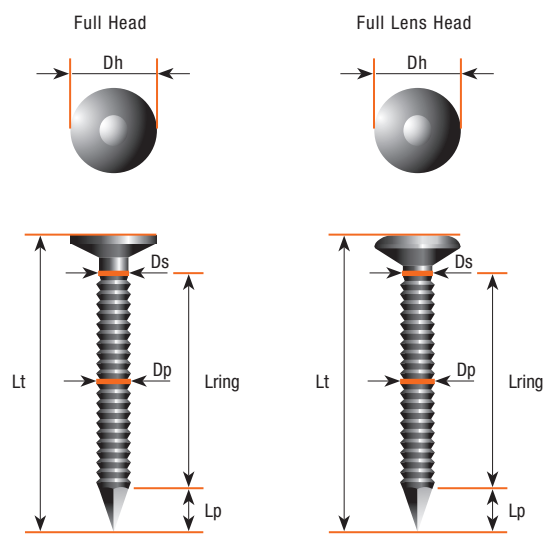

27 nails per strip

INTENDED USE - CORROSION PROTECTION

- **Timber-to-Timber**




Finishes	Eurocode 5 Service Class	Label colour on packaging
Stainless Steel A2 - AISI 304	Service Class 1 Indoor use 	Yellow
	Service Class 2 Outdoor protected use 	
	Service Class 3 Outdoor use 	

CHARACTERISTIC PARAMETERS

“Calculated or tested according to EUROCODE 5”

Head pull-through	Withdrawal	Yield moment
$f_{head,k}$ [N/mm ²]	$f_{ax,k}$ [N/mm ²]	$M_{y,k}$ [Nmm]
20.30	7.60	2 824

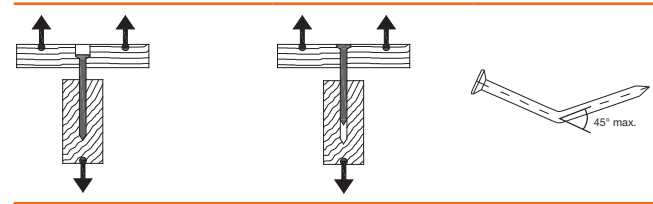

- Values are based on a mean characteristic wood density of 350 kg/m³.
- Characteristic parameters must always be reduced to design values by using partial factors.

NAIL DIMENSIONS*

Ds (in mm)	Length Lt (in mm)	Lring min. (in mm)	Lp max. (in mm)
2.8	45	35.0	4.2
2.8	55	38.3	4.2
2.8	70	48.5	4.2
2.8	80	58.5	4.2

* In order to select the correct nail length for a given connection please always consult standards and good practice on your local market.

¹ Tolerance according to EN10218-2 for wire diameter and according to EN14592 for the nail length.
² Tolerance ± 0.3 mm.
³ Please check availability of the reference in the Product Catalogue.