



Staple type: S30 Staples
Wire Ø: 0.74mm


Suitable for the following tools:

Paslode 1000 S-30SR

Staple lengths available: 8mm – 25mm
Staples per strip: 160

CORROSION PROTECTION

Finish	Usage Environment	Label Colour on Packaging
Zinc Galv 1-3µm	INDOOR 	Blue
Stainless Steel A4 AISI 316 / WNr 1.4401	INDOOR, COVERED OUTDOOR & OUTDOOR 	Yellow

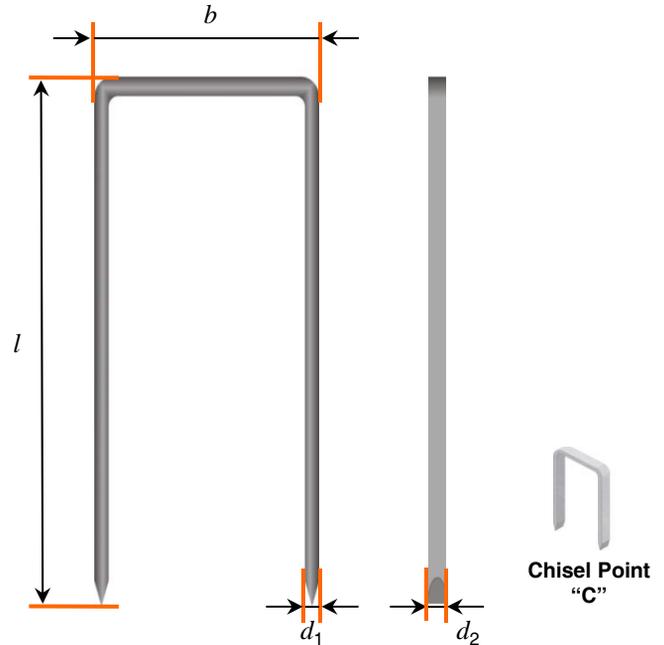

STAPLE PROPERTIES / DIMENSIONS

Tensile strength of wire:	min 900 N/mm ²
Nominal diameter (<i>d</i>):	0.74mm
Flattened wire dimension:	(<i>d</i> ₁): 0.60mm (<i>d</i> ₂): 0.80mm
Outside crown width (<i>b</i>):	8.65mm
Strip length:	approx 128.50mm
Standard point:	“C”
Coated leg length:	Full

STAPLE LENGTHS AVAILABLE*

Finish	Lengths Available <small>*Other lengths on request</small>
Zinc Galv 1-3µm	8mm, 10mm, 13mm, 16mm
Stainless Steel A4 AISI 316 / WNr 1.4401	10mm, 12mm

Paslode is a brand of the ITW Group. ITW reserves the right to change specification without notice. All design using this data should be carried out by a qualified structural engineer, subject to relevant National and European standards or regulations.